


200 METERS

385 METERS

387 METERS

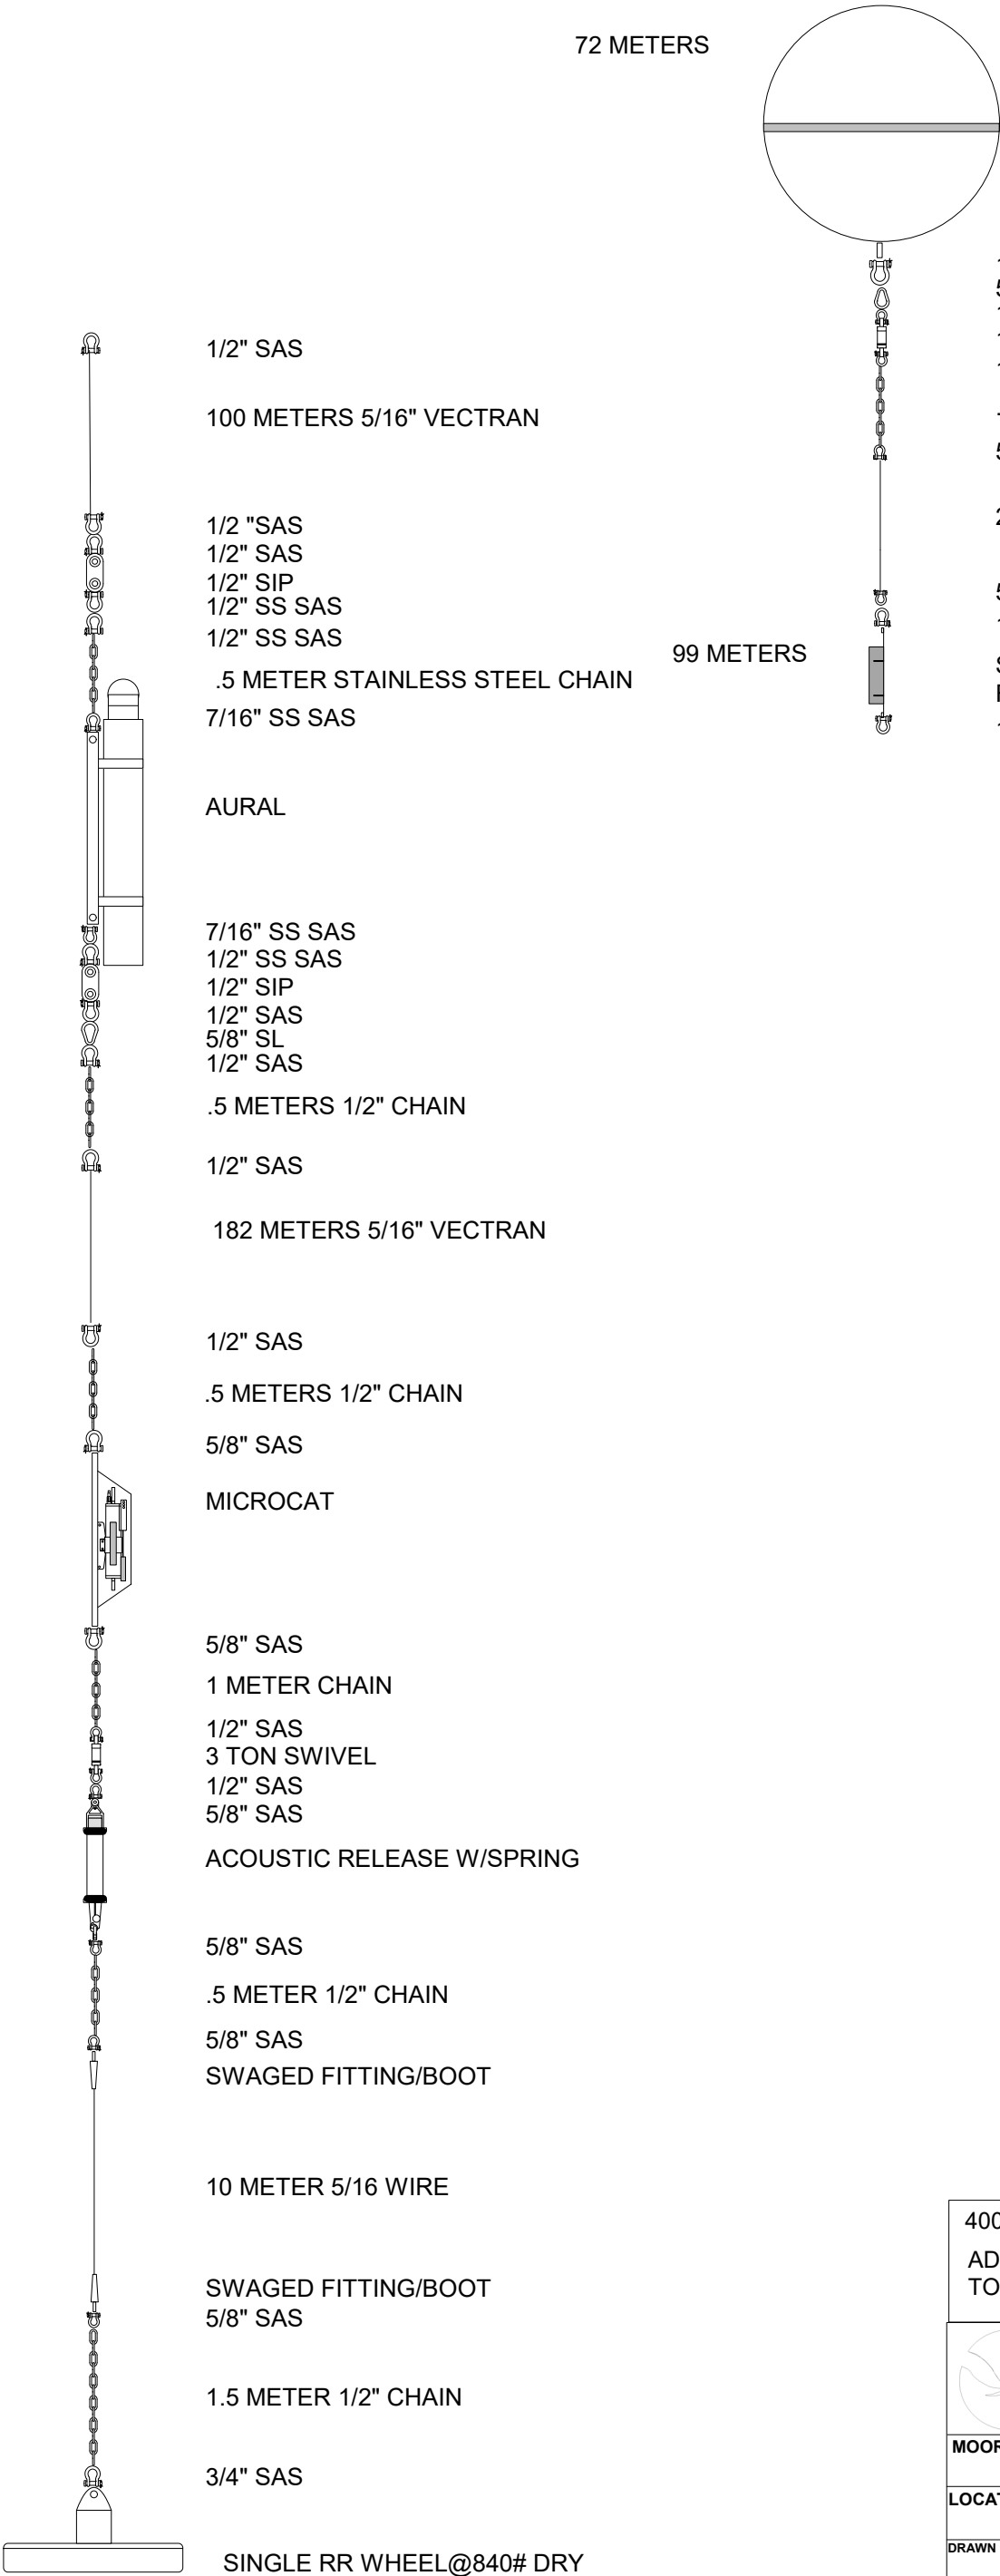

72 METERS

36" SYNTACTIC FLOAT

1/2" SAS
5/8" SL
1/2" SAS
1.5 TON SWIVEL
1/2" SAS
.5 METERS 1/2" CHAIN
5/8" SAS W/THIMBLE BUSHING

25 METERS 3/4" NYLON

5/8" SAS W/THIMBLE BUSHING
1/2" SAS
SOUND TRAP
FPOD
1/2" SAS

99 METERS

1/2" SAS
100 METERS 5/16" VECTRAN
1/2" SAS
1/2" SIP
1/2" SS SAS
1/2" SS SAS
.5 METER STAINLESS STEEL CHAIN
7/16" SS SAS

AURAL

7/16" SS SAS
1/2" SS SAS
1/2" SIP
1/2" SAS
5/8" SL
1/2" SAS
.5 METERS 1/2" CHAIN

1/2" SAS

182 METERS 5/16" VECTRAN

1/2" SAS
.5 METERS 1/2" CHAIN
5/8" SAS

MICROCAT

5/8" SAS
1 METER CHAIN
1/2" SAS
3 TON SWIVEL
1/2" SAS
5/8" SAS
ACOUSTIC RELEASE W/SPRING

5/8" SAS
.5 METER 1/2" CHAIN
5/8" SAS
SWAGED FITTING/BOOT


10 METER 5/16 WIRE

SWAGED FITTING/BOOT
5/8" SAS

1.5 METER 1/2" CHAIN

3/4" SAS

SINGLE RR WHEEL@840# DRY

400 METER BOTTOM ADD LENGTHS OF 3/8" YALEX TO MAKE UP FOR DEEPER DEPLOYMENT	
<div><div></div><div>NOAA-PMEL 7600 Sandpoint Way NE Seattle, Wa. 98115 (206) 526-6023</div></div>	
MOORING:	AURAL
LOCATION:	CHIRIKOF
DRAWN BY: MIKE CRAIG	DATE: 29 JUNE 2023
APPROVED BY:	DATE: